

# T-FIT® Hygiene

Moisture and microbial resistance and cGMP

# T-FIT®

INSULATION

Fit to perform. Fit to last



The following document describes the performance of T-FIT® Hygiene insulation regarding moisture and microbial resistance.

These properties are important in cleanroom, food and beverage, and pharmaceutical facilities. Moisture penetration can have debilitating effects; water conducts heat around twenty times better than air, so if moisture penetrates the insulation material it can cause an increase in the thermal conductivity of the insulation, reducing its effectiveness. Moisture penetration can also promote serious problems such as corrosion under insulation and bacterial growth, as well as increase the mass of the insulation, which can put the pipe system under additional strains.


Preventing mould growth is especially important in these environments, since microbial growth can lead to contamination of the clean environment and any products that are made within them. The T-FIT tubes have a moulded surface, so pores or cut cells are sealed off to give a smooth, clean surface. This has the benefit that microbes or debris that could provide nutrients for their growth do not collect in the surface of the insulation.

### Fungus resistance testing

The materials used to make T-FIT insulation have been tested against ASTM G21, a standard test used for determining the resistance of polymeric materials to fungi. In this test, five different species of fungal spores are introduced to the test materials placed on agar for 28 days and the extent of mould growth assessed. The test is carried out in conditions favourable for mould growth (at a temperature of 28-30°C and relative humidity of over 85%).

T-FIT materials consistently receive a mould growth rating of zero for this test, where there is no observed growth on specimens (sporulating or non-sporulating or both).

Observed growth on specimens (sporulating or non-sporulating or both)	Grade
None	0
Traces of growth (less than 10%)	1
Light growth (10% to 30%)	2
Medium growth (30% to 60%)	3
Heavy growth (60% to complete average)	4

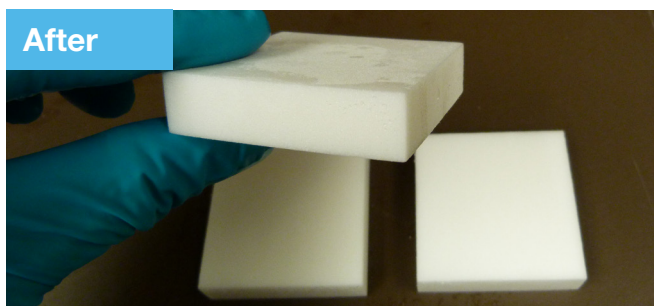

The images above show the foam samples before and after the test; as one can see the samples look as good as new, even after 28-days exposure to a variety of fungal spores in high humidity.

## Moisture resistance

If moisture penetrates the insulation, then this can raise its thermal conductivity and the insulation becomes less effective. Also, if condensation reaches the pipe surface then this can lead to corrosion under insulation and cause severe damage. The closed cell foam material used in T-FIT Clean/Hygiene provides a good barrier to moisture penetration; they don't rely on cladding like most other types of insulation.

The foam materials used to make T-FIT Clean and Hygiene have high water vapour diffusion resistance indexes ( $\mu$  values). These values indicate the relative reluctance of the material to allow the passage of water vapour compared to an equally thick layer of stationary air at the same temperature. A high value indicates that the insulation provides a good barrier to water vapour transmission.

For example, a 6.35 mm thick layer of T-FIT Clean insulation at 23°C has the same water vapour permeability as approximately 40 metres of air at the same temperature.

Material	Test conditions	Indicative $\mu$ value
F42HTLS	Temperature: 22.0 °C Relative humidity: 49% RH Atmospheric pressure: 101 kPa	6500
F43HT	Temperature: 22.0 °C Relative humidity: 49% RH Atmospheric pressure: 101 kPa	7500

## Current Good Manufacturing Practices (cGMP)

Current Good Manufacturing Practices, or cGMP are the FDA's formal regulations concerning the design, monitoring and control of manufacturing processes and facilities in the pharmaceutical industry. The FDA requires medication manufacturers to adhere to these regulations, which provide assurance that the drugs manufactured have the required strength and quality.

Manufacturers should use current technologies and systems in order to comply with the regulations. They must establish quality management systems, use high-quality materials and establish standard operating procedures to guarantee good quality product. The FDA has authority to inspect manufacturing facilities to check cGMP compliance.

Facilities involving the production or distribution of medicines which use T-FIT Clean insulation have consistently passed cGMP inspections. As well as the good moisture and microbial resistance described above, T-FIT Clean insulation exhibits low outgassing and is specification tested to FM 4910. These attributes mean that T-FIT Clean is a good choice for clean manufacturing environments that need to achieve cGMP compliance.

Zotefoams' UK manufacturing site is certified to Quality Management System – ISO 9001, in which many aspects of good manufacturing practice regulation are covered.

## Exclusion of Liability

Any information contained in this document is, to the best of the knowledge and belief of Zotefoams plc and of Zotefoams Inc. (together herein referred to as ZOTEFOAMS), accurate. Any liability on the part of ZOTEFOAMS or any subsidiary or holding company of ZOTEFOAMS for any loss, damage, costs or expenses directly or indirectly arising out of the use of such information or the use, application, adaptation or processing of any goods, materials or products described herein is, save as provided in ZOTEFOAMS' conditions of sale ("Conditions of Sale"), hereby excluded to the fullest extent permitted by law. Where ZOTEFOAMS' goods or materials are to be used in conjunction with other goods or materials, it is the responsibility of the user to obtain from the manufacturers or suppliers of the other goods or materials all technical data and other properties relating to those other goods or materials. Save as provided in the Conditions of Sale no liability can be accepted in respect of the use of ZOTEFOAMS' goods or materials in conjunction with any other goods or materials.

Where ZOTEFOAMS' goods or materials are likely to come into contact with foodstuffs or pharmaceuticals, whether directly or indirectly, or are likely to be used in the manufacture of toys, prior written confirmation of compliance with relevant legislative or regulatory standards for those applications may be requested from ZOTEFOAMS, if appropriate. Save as provided in the Conditions of Sale no liability can be accepted for any damage, loss or injury directly or indirectly arising out of any failure by the user to obtain such confirmation or to observe any recommendations given by or on behalf of ZOTEFOAMS.

ZOTEFOAMS MAKES NO WARRANTIES EXPRESS OR IMPLIED, EXCEPT TO THE EXTENT SET OUT IN THE CONDITIONS OF SALE, AND HEREBY SPECIFICALLY EXCLUDES ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ANY GOODS, MATERIALS OR PRODUCTS DESCRIBED HEREIN.

Zotefoams plc Management systems are covered by the following:



Quality  
FM 01570  
ISO 9001:2015



Safety  
OHS 52538  
ISO 45001:2018



Environment  
EMS 36270  
ISO 14001:2015

### Zotefoams plc

675 Mitcham Road  
Croydon, Surrey  
CR9 3AL, United Kingdom  
Tel: +44 (0) 20 8664 1600  
Email: t-fitsales@zotefoams.com

### T-FIT Insulation Solutions India Private Limited

810 Shapath V, S.G. Highway  
Ahmedabad, Gujarat, 380015  
Tel: +91 (0) 7433946464  
Email: t-fitindia@zotefoams.com

### Zotefoams T-FIT Material Technology (Kunshan) Co., Ltd

181 Huanlou Road, Development Zone,  
Kunshan City, Jiangsu Pr. China 215333  
Tel: +86 (0) 512 5012 6001-8001  
Email: t-fitchina@zotefoams.com

### Zotefoams Inc.

55 Precision Drive  
Walton KY, 41094 USA  
Tel: +1 (0) 859 371 4025  
Free: (800) 362-8358 (US Only)  
Email: t-fitusa@zotefoams.com

T-FIT® and ZOTEK®  
are registered trademarks  
of Zotefoams plc.  
All rights reserved.  
Issue 2  
Revision 6

If you would like more information visit our website [www.zotefoams.com](http://www.zotefoams.com)